

METRO 110 LADDER

LEGACY, DEPENDABILITY, TRUST




E-ONE's Metro 110 aerial ladder has served fire departments for over 40 years across the country. Providing reliable service to many big cities, it's been a first climb for many firefighters training years. It's been a first out, always ready, tried and true with countless customer testimonials and stories. Why change a design when it's performed so well for so long? When you're looking for an aerial device, small jack spread, small wheelbase, packing a tremendous amount of compartment space and flexibility, look no further at the Metro 110 Ladder.



e-one.com

VERSATILE LADDER

The Metro 110 Ladder is available with a Typhoon or Cyclone chassis. The best part is that this ladder is available on a single or tandem axle quint or no pump no tank configurations all while not compromising compartment space, ground ladder storage and pump options.

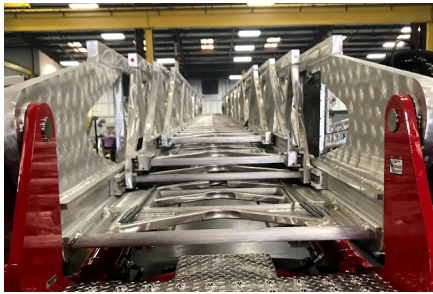

→ EXTRUDED ALUMINUM AERIAL

Fully welded extruded aluminum with integral non-slip rungs and tall handrails for safe and secure climbing. Aluminum aerial provides a low total cost of ownership since it will never rust, need repainting, or have to have rubber rung covers replaced.



→ EXTRUDED ALUMINUM BODY

Full depth / full height compartments on both sides provide excellent storage capacity. SideStacker™ body design allows for re-packing hose bed without raising the aerial. Short rear overhang with raised rear perimeter provides excellent maneuverability.



→ CRISSCROSS UNDERSLUNG OUTRIGGERS

The Metro 100 Quint features crisscross underslung outriggers with a spread of only 11'. The compact design can set up in tight conditions. Stowing below the body allows for additional compartmentation not possible with other outrigger designs.

VERTICAL REACH	110'
HORIZONTAL REACH	102'
TIP LOAD	250 lbs. from 0-20 degrees 500 lbs 21 to 35 degrees
WATERWAY	Waterway flows up to 1500 GPM
OUTRIGGERS	Crisscross underslung outriggers with 11' spread
CAB	Typhoon or Cyclone cab
CHASSIS	Powder coated hot dipped galvanized frame rails with a 220"-230" wheelbase
AERIAL CONTROLS	Manual, AACS Basic and AACS Deluxe
ENGINE	Cummins engine up to 605 HP
BODY CONFIGURATION	Extruded aluminum body with Sidestacker or no pump no tank configurations
GROUND LADDERS	Minimum 127' of ground ladders

e-one.com
352.237.1122



DELIVERING STRENGTH THROUGH EXCELLENCE.