

# HP 95 MID-MOUNT

A MID-MOUNT WITH A SINGLE SET OF OUTRIGGERS



The HP 95 Mid-Mount platform is designed for departments that have travel height restrictions or prefer a centrally located turntable. The extruded aluminum aerial is exceptionally stable, and with only one set of extending stabilizers and auto-levelling system, is quick and easy to set up in tight locations. With waterway flows up to 2000 GPM and a large mid-ship pump, the HP 95 platform has excellent fire-fighting capability. The extruded aluminum body features a no pump no tank and quint configurations with wide ladder tunnel option and 300-to-500-gallon tank.



[e-one.com](http://e-one.com)


# STRENGTH AND *VERSATILITY*

The HP 95 Mid-Mount Platform has one of the highest load ratings in the industry and can carry up to 1000-lbs. of personnel plus 305 lbs of equipment at full extension and all angles of elevation without water flowing. The HP-95 is available with up to 2000-GPM pump capacity, up to a 500-gallon water tank and various body configurations to meet your department's needs.



## → EXTRUDED ALUMINUM AERIAL

Fully welded extruded aluminum with integral non-slip rungs and tall handrails for safe and secure climbing. Aluminum aerial provides a low total cost of ownership since it will never rust, need repainting, or have to have rubber rung covers replaced.

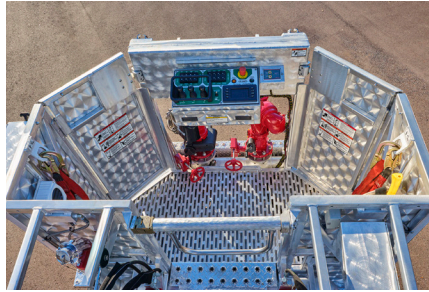

## →

The HP 95 Mid-Mount platform supports 1,305 lb. (1,000 lbs. firefighters and 305 lbs. of equipment). The angled corners and dual inward swinging front corner gates provide easy access. Available with single or dual monitors located at the front of the platform.



## →

With just a single set of crisscross underslung outriggers with a spread of 18', this device can be quickly positioned at a congested fire scene.

<b>VERTICAL REACH</b>	95'
<b>HORIZONTAL REACH</b>	88'
<b>TIP LOAD</b>	1305 lb. tip load wet or 805lb. tip load dry
<b>WATERWAY</b>	Waterway flows up to 2000 GPM
<b>OUTRIGGERS</b>	Crisscross underslung outriggers with 18' spread and small H-style outridders with 11' spread
<b>CAB</b>	Typhoon or Cyclone cabs
<b>CHASSIS</b>	Integral torque box with a wheelbase starting at 255"
<b>AERIAL CONTROLS</b>	AACS Deluxe
<b>ENGINE</b>	Cummins engine up to 605 HP
<b>BODY CONFIGURATION</b>	Extruded aluminum body with Sidestacker or no pump no tank configurations
<b>GROUND LADDERS</b>	Starting at 163' of ground ladders
<b>PUMP</b>	Hale or Waterous up to 2,000 GPM

e-one.com  
352.237.1122



DELIVERING STRENGTH THROUGH EXCELLENCE.