


E-ONE Select Series™

Rescue Pumper (Aluminum Body)

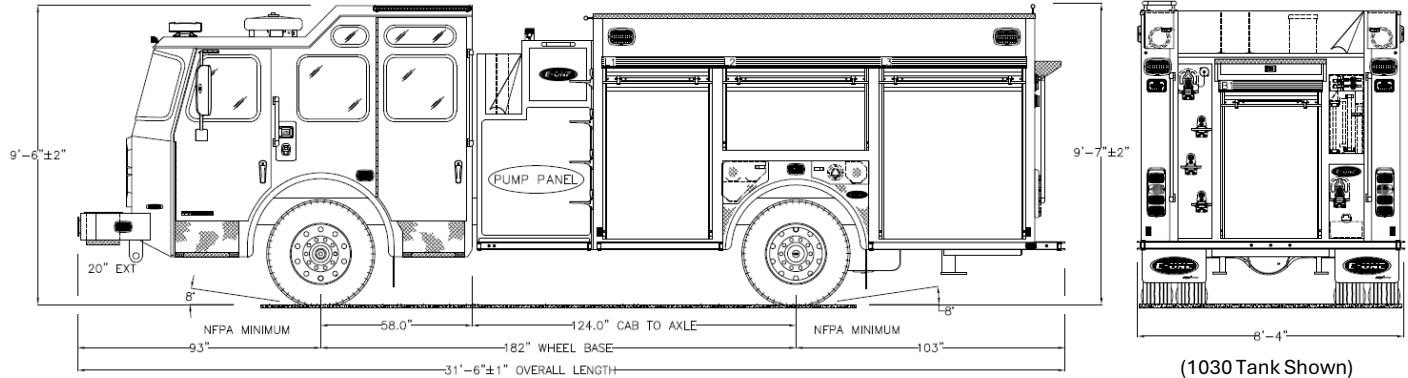

Custom Chassis

- Cyclone® or Typhoon® chassis
- Medium (58”), long (67.5”) and stretched long (74”) 4-door cab lengths available with seating for up to (8).
- Optional 12” or 16” rear Vista roof heights (with Cyclone cab a 4” front raised roof is included with Vista roof option). Cyclone cab also available with 4” full length raised roof.
- 450 HP engine (1250 torque w/EVS3000 trans or 1650 torque with EVS4000 trans)
- Standard safety features such as roll cage cab, front and side air bags, CrewGuard & Electronic Stability Control.
- Optional wheel well, rear wall and lower rear side cabinets.
- Galvanized / powder coated frame for corrosion protection
- Bumper options include 10” polished stainless, 10” or 12” HD steel channel with extensions of 12”, 20” or 24”. (Bumper crosslays include a 28” extension)
- “Black out” options for the cab, bumper and body available.

Body Features

- Extruded aluminum “flat back” rescue pumper body
- 42” / 56” Wide full height side compartments, deep upper on left side.
- Tall B1 (Separate compartment)
- Narrow roof top compartments available for equipment or hard suction hose storage
- 780 or 1030-gallon tank capacities available with optional integral foam cell
- Enclosed officer side tunnel for 24’ 2-section, 14’ roof and 10’ attic ladders, backboard and (2) or (3) 10’ pike poles.
- Roll-up or hinged body doors with optional drip pans
- Body options include diamond plate hose bed covers, wheel well storage, and shelves, trays and tool boards for equipment mounting.

Fire Package

- Pump module designs available include Side-Mount, enclosed Side-Mount, Top-Mount, Top-Mount with integral speedlays and Top-Mount with forward speedlay module.

Fire Package (cont.)


- Hale and Waterous pumps up to 2000 GPM with stainless steel discharge manifold
- Standard discharges include (2) 2.5” left side, 2.5” and 4” right side, 2.5” driver side rear, 1.5” crosslay and / or speedlay (if equipped) and 3” deck gun.
- Options available for additional 2.5” rear discharges, 1.5” or 2.5” front bumper discharge, bumper crosslays, decontamination outlet and top or rear booster reel.
- Direct injection foam system or foam educator available
- Integral master intake valves and front intake available

Electrical & Warning

- Multiplex electrical system provides increased feature capability and improved diagnostics
- Standard color display for driver; additional officer side display available.
- Wide selection of LED warning, LED scene lights and sirens are available
- Cab roof mounted light tower w/12v LED heads also available

E-ONE Select Series™

Rescue Pumper (Stainless Body)

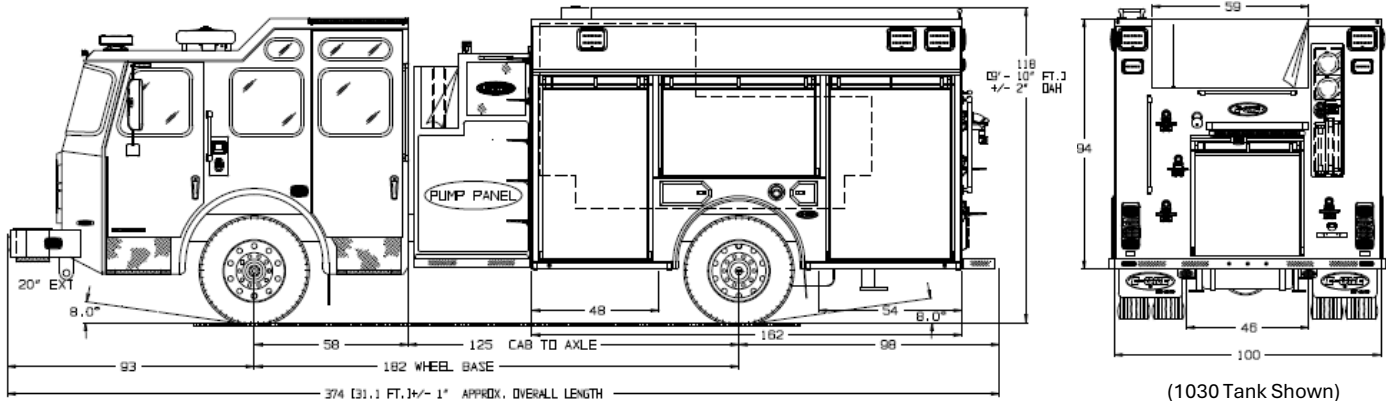

Custom Chassis

- Cyclone® or Typhoon® chassis
- Medium (58”), long (67.5”) and stretched long (74”) 4-door cab lengths available with seating for up to (8).
- Optional 12” or 16” rear Vista roof heights (with Cyclone cab a 4” front raised roof is included with Vista roof option). Cyclone cab also available with 4” full length raised roof.
- 450 HP engine (1250 torque w/EVS3000 trans or 1650 torque with EVS4000 trans)
- Standard safety features such as roll cage cab, front and side air bags, CrewGuard & Electronic Stability Control.
- Optional wheel well, rear wall and lower rear side cabinets.
- Galvanized / powder coated frame for corrosion protection
- Bumper options include 10” polished stainless, 10” or 12” HD steel channel with extensions of 12”, 20” or 24”. (Bumper crosslays include a 28” extension)
- “Black out” options for the cab, bumper and body available.

Body Features

- Stainless steel “flat back” rescue pumper body with FRP overlays and full width upper body sides
- 44” / 50” wide compartment openings with deep upper on left side
- Semi-tall B1 (Separate compartment)
- 780 or 1030-gallon tank capacities available with optional integral foam cell
- Enclosed officer side tunnel for 24’ 2-section, 14’ roof and 10’ attic ladders, (2) hard suction hoses, backboard and (2) or (3) 10’ pike poles.
- Roll-up or hinged body doors with optional drip pans
- Body options include diamond plate hose bed covers, wheel well storage, and shelves, trays and tool boards for equipment mounting.

Fire Package

- Pump module designs available include Side-Mount, enclosed Side-Mount, Top-Mount, Top-Mount with integral speedlays and Top-Mount with forward speedlay module.

Fire Package (cont.)


- Hale and Waterous pumps up to 2000 GPM with stainless steel discharge manifold
- Standard discharges include (2) 2.5” left side, 2.5” and 4” right side, 2.5” driver side rear, 1.5” crosslay and / or speedlay (if equipped) and 3” deck gun.
- Options available for additional 2.5” rear discharges, 1.5” or 2.5” front bumper discharge, bumper crosslays, decontamination outlet and top or rear booster reel.
- Direct injection foam system or foam educator available
- Integral master intake valves and front intake available

Electrical & Warning

- Multiplex electrical system provides increased feature capability and improved diagnostics
- Standard color display for driver; additional officer side display available.
- Wide selection of LED warning, LED scene lights and sirens are available.
- Cab roof mounted light tower w/12v LED heads also available

E-ONE Select Series™

eMAX Pumper (Aluminum Body)

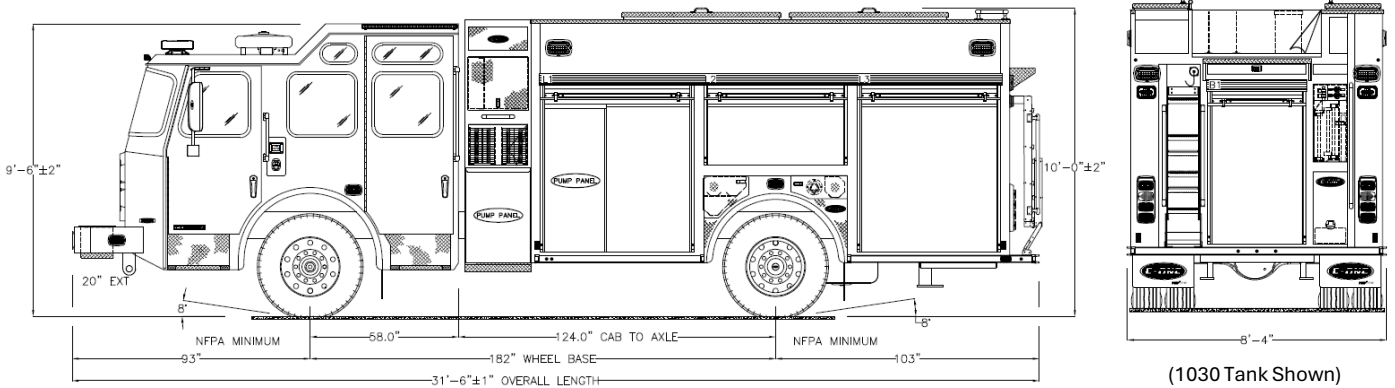

Custom Chassis

- Cyclone® or Typhoon® chassis
- Medium (58"), long (67.5") and stretched long (74") 4-door cab lengths available with seating for up to (8).
- Optional 12" or 16" rear Vista roof heights (with Cyclone cab a 4" front raised roof is included with Vista roof option). Cyclone cab also available with 4" full length raised roof.
- 182" Wheelbase with medium cab (192" with long cab, 198" with stretched long cab).
- 450 HP engine (1250 torque w/EVS3000 trans or 1650 torque with EVS4000 trans)
- Standard safety features such as roll cage cab, front and side air bags, CrewGuard & Electronic Stability Control.
- Optional wheel well, rear wall and lower rear side cabinets.
- Galvanized / powder coated frame for corrosion protection
- Bumper options include 10" polished stainless, 10" or 12" HD steel channel with extensions of 12", 20" or 24". (Bumper crosslays include a 28" extension)
- "Black out" options for the cab, bumper and body available.

Body Features

- Extruded aluminum "flat back" eMAX rescue pumper body.
- 60" / 56" Full height side compartments, deep upper on left side.
- Narrow or wide roof top compartments (wide includes inset upper rear landing)
- Tall B1 (Separate compartment)
- 780 or 1030-gallon tank capacities available with optional integral foam cell
- Enclosed officer side tunnel for 24' 2-section, 14' roof and 10' attic ladders, backboard and (2) or (3) 10' pike poles.
- Low pre-connected hand lines with transverse upper storage area, optional wide upper storage for stokes basket.
- Roll-up or hinged body doors (Roll-up only over pump panel)
- Body options include diamond plate hose bed covers, wheel well storage, and shelves, trays and tool boards for equipment mounting.

Fire Package

- E-ONE or Hale pumps up to 2000 GPM with stainless steel manifold

Fire Package (cont.)


- Compact pump operator panel design is enclosed inside compartment L1
- Standard discharges include (2) 2.5" left side, 2.5" and 4" right side, 2.5" driver side rear and 3" deck gun. Speedlay plumbing options include (2) 1.5" or (2) 1.5" and (1) 2.5".
- Options available for 1.5" or 2.5" front bumper discharge, bumper crosslays, rear booster reel and decontamination outlet.
- Direct injection foam system or foam eductor available
- Low master intakes for easier hose connection – integral master intake valves and front intake available.

Electrical & Warning

- Multiplex electrical system provides increased feature capability and improved diagnostics
- Standard color display for driver; additional officer side display available.
- Wide selection of LED warning, LED scene lights and sirens are available.
- Cab roof mounted light tower w/12v LED heads also available

E-ONE Select Series™

eMAX Pumper (Stainless Body)

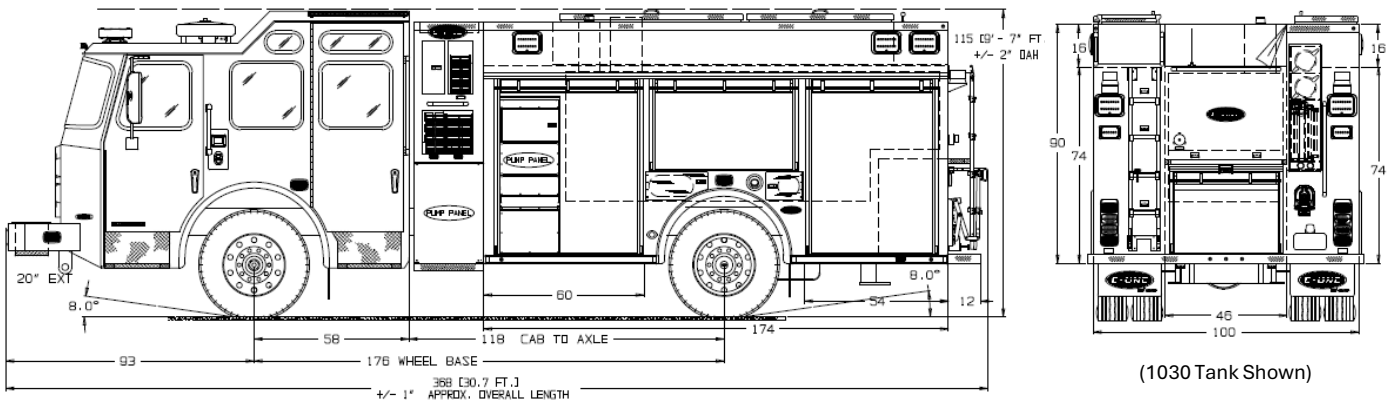

Note: 176" WB medium cab requires X10 MHD

Custom Chassis

- Cyclone® or Typhoon® chassis
- Medium (58"), long (67.5") and stretched long (74") 4-door cab lengths available with seating for up to (8).
- Optional 12" or 16" rear Vista roof heights (with Cyclone cab a 4" front raised roof is included with Vista roof option). Cyclone cab also available with 4" full length raised roof.
- 176" Wheelbase with medium cab (186" with long cab, 192" with stretched long cab).
- 450 HP engine (1250 torque w/EVS3000 trans or 1650 torque with EVS4000 trans)
- Standard safety features such as roll cage cab, front and side air bags, CrewGuard & Electronic Stability Control.
- Optional wheel well, rear wall and lower rear side cabinets.
- Galvanized / powder coated frame for corrosion protection
- Bumper options include 10" polished stainless, 10" or 12" HD steel channel with extensions of 12", 20" or 24". (Bumper crosslays include a 28" extension)
- "Black out" options for the cab, bumper and body available.

Body Features

- Stainless steel "flat back" eMAX rescue pumper body with FRP overlays and full width upper body sides.
- 56" / 50" wide compartment openings with deep upper on left side
- Wide rooftop compartments standard with top doors. Includes rear landing on left side.
- Semi-tall B1 (Separate compt)
- 780 or 1030-gallon tank capacities available with optional integral foam cell
- Enclosed officer side tunnel for 24' 2-section, 14' roof and 10' attic ladders, backboard and (2) or (3) 10' pike poles.
- Low pre-connected hand lines with transverse upper storage area for stokes basket.
- Roll-up or hinged body doors (Roll-up only over pump panel)
- Body options include diamond plate hose bed covers, wheel well storage, and shelves, trays and tool boards for equipment mounting.

Fire Package

- E-ONE or Hale pumps up to 2000 GPM with stainless steel manifold

Fire Package (cont.)


- Compact pump operator panel design is enclosed inside compartment L1
- Standard discharges include (2) 2.5" left side, 2.5" and 4" right side, 2.5" driver side rear and 3" deck gun. Speedlay plumbing options include (2) 1.5" or (2) 1.5" and (1) 2.5".
- Options available for 1.5" or 2.5" front bumper discharge, bumper crosslays, rear booster reel and decontamination outlet.
- Direct injection foam system or foam eductor available
- Low master intakes for easier hose connection – integral master intake valves and front intake available.

Electrical & Warning

- Multiplex electrical system provides increased feature capability and improved diagnostics
- Standard color display for driver; additional officer side display available.
- Wide selection of LED warning, LED scene lights and sirens are available.
- Cab roof mounted light tower w/12v LED heads also available

E-ONE Select Series™

Pumper W/ External Ladders (Aluminum Body)

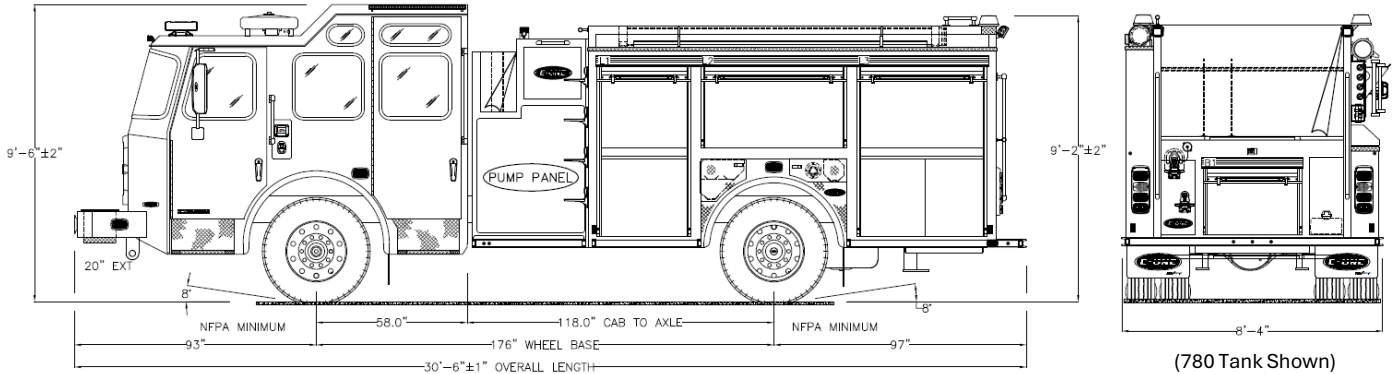

Note: Medium cab and 39" SM module requires X10 MHD

Custom Chassis

- Cyclone® or Typhoon® chassis
- Medium (58"), long (67.5") and stretched long (74") 4-door cab lengths available with seating for up to (8).
- Optional 12" or 16" rear Vista roof heights (with Cyclone cab a 4" front raised roof is included with Vista roof option). Cyclone cab also available with 4" full length raised roof.
- 450 HP engine (1250 torque w/EVS3000 trans or 1650 torque with EVS4000 trans)
- Standard safety features such as roll cage cab, front and side air bags, CrewGuard & Electronic Stability Control.
- Optional wheel well, rear wall and lower rear side cabinets.
- Galvanized / powder coated frame for corrosion protection
- Bumper options include 10" polished stainless, 10" or 12" HD steel channel with extensions of 12", 20" or 24". (Bumper crosslays include a 28" extension)
- "Black out" options for the cab, bumper and body available.

Body Features

- Extruded aluminum "flat back" pumper body
- 36" / 50" Wide compartments; High left side with shallow uppers, half right side.
- Diamond plate or inset painted wheel wells with bolt-on polished alum or rubber trim
- Low B1 (Transverse); hinged or roll-up door
- 530, 780 or 1030-gallon tank capacities available with optional integral foam cell
- Right side brackets to hold 24' 2-section, 14' roof, 10' attic ladders and (2) or (3) 10' pike poles. Storage tray for high-rise packs available below ladders.
- Roll-up or hinged side body doors with optional drip pans
- Body options include diamond plate hose bed covers, wheel well storage, shelves, trays and tool boards for equipment mounting.

Fire Package

- Pump module designs available include Side-Mount, Top-Mount, Top-Mount with integral speedlays and Top-Mount with forward speedlay module.

Fire Package (cont.)


- Hale and Waterous pumps up to 2000 GPM with stainless steel discharge manifold
- Standard discharges include (2) 2.5" left side, 2.5" and 4" right side, 2.5" driver side rear, 1.5" crosslay and / or speedlay (if equipped) and 3" deck gun.
- Options available for additional 2.5" rear discharges, 1.5" or 2.5" front bumper discharge, bumper crosslays, decontamination outlet and top or rear booster reel.
- Direct injection foam system or foam eductor available
- Integral master intake valves and front intake available

Electrical & Warning

- Multiplex electrical system provides increased feature capability and improved diagnostics
- Standard color display for driver; additional officer side display available.
- Wide selection of LED warning, LED scene lights and sirens are available
- Cab roof mounted light tower w/12v LED heads also available

E-ONE Select Series™

Pumper W/ External Ladders (Stainless Body)

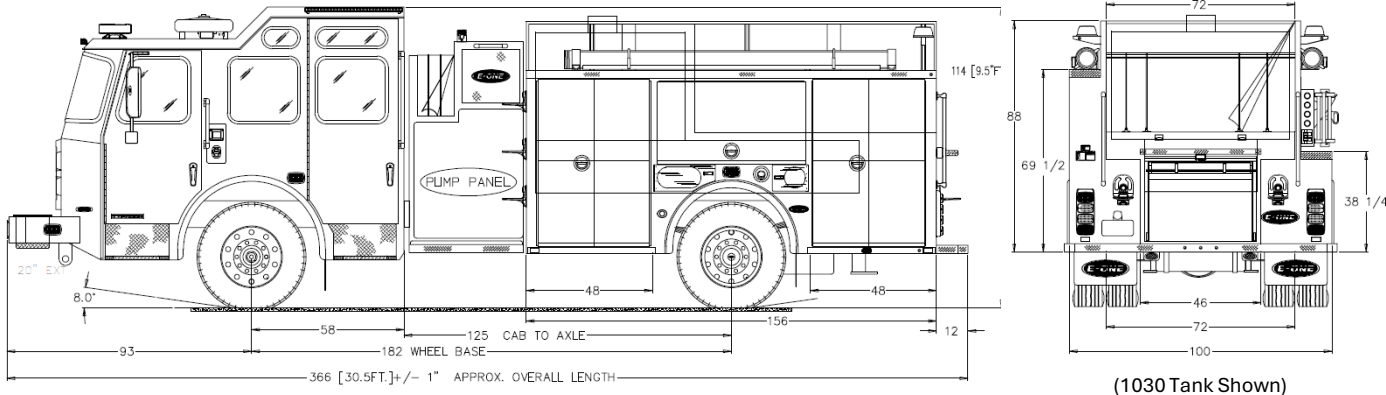

Custom Chassis

- Cyclone® or Typhoon® chassis
- Medium (58”), long (67.5”) and stretched long (74”) 4-door cab lengths available with seating for up to (8).
- Optional 12” or 16” rear Vista roof heights (with Cyclone cab a 4” front raised roof is included with Vista roof option). Cyclone cab also available with 4” full length raised roof.
- 450 HP engine (1250 torque w/EVS3000 trans or 1650 torque with EVS4000 trans)
- Standard safety features such as roll cage cab, front and side air bags, CrewGuard & Electronic Stability Control.
- Optional wheel well, rear wall and lower rear side cabinets.
- Galvanized / powder coated frame for corrosion protection
- Bumper options include 10” polished stainless, 10” or 12” HD steel channel with extensions of 12”, 20” or 24”. (Bumper crosslays include a 28” extension)
- “Black out” options for the cab, bumper and body available.

Body Features

- Stainless steel “flat back” pumper body with FRP overlays
- 44” / 44” Wide compartment openings; High left side with shallow uppers, half right side.
- Low B1 (Separate compartment); hinged or roll-up door.
- 530, 780 or 1030-gallon tank capacities available with optional integral foam cell
- Right side brackets to hold 24’ 2-section, 14’ roof, 10’ attic ladders and (2) or (3) 10’ pike poles. Storage tray for high-rise packs available below ladders.
- Roll-up or hinged side body doors with optional drip pans
- Body options include diamond plate hose bed covers, wheel well storage, shelves, trays and tool boards for equipment mounting.

Fire Package

- Pump module designs available include Side-Mount, Top-Mount, Top-Mount with integral speedlays and Top-Mount with forward speedlay module.

Fire Package (cont.)


- Hale and Waterous pumps up to 2000 GPM with stainless steel discharge manifold
- Standard discharges include (2) 2.5” left side, 2.5” and 4” right side, 2.5” driver side rear, 1.5” crosslay and / or speedlay (if equipped) and 3” deck gun.
- Options available for additional 2.5” rear discharges, 1.5” or 2.5” front bumper discharge, bumper crosslays, decontamination outlet and top or rear booster reel.
- Direct injection foam system or foam eductor available
- Integral master intake valves and front intake available

Electrical & Warning

- Multiplex electrical system provides increased feature capability and improved diagnostics
- Standard color display for driver; additional officer side display available.
- Wide selection of LED warning, LED scene lights and sirens are available
- Cab roof mounted light tower w/12v LED heads also available

E-ONE Select Series™

Pumper W/ Ladder Tunnel (Aluminum Body)

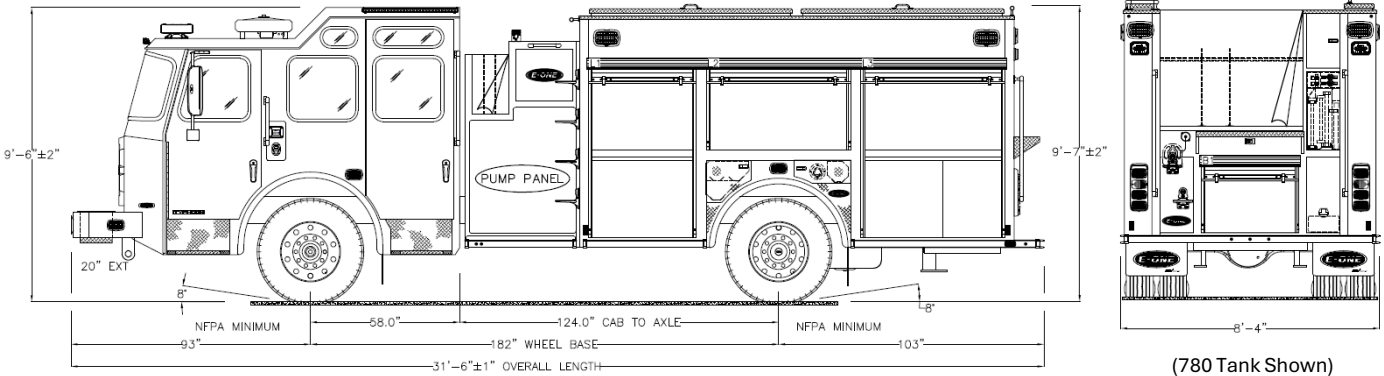

Custom Chassis

- Cyclone® or Typhoon® chassis
- Medium (58"), long (67.5") and stretched long (74") 4-door cab lengths available with seating for up to (8).
- Optional 12" or 16" rear Vista roof heights (with Cyclone cab a 4" front raised roof is included with Vista roof option). Cyclone cab also available with 4" full length raised roof.
- 450 HP engine (1250 torque w/EVS3000 trans or 1650 torque with EVS4000 trans)
- Standard safety features such as roll cage cab, front and side air bags, CrewGuard & Electronic Stability Control.
- Optional wheel well, rear wall and lower rear side cabinets.
- Galvanized / powder coated frame for corrosion protection
- Bumper options include 10" polished stainless, 10" or 12" HD steel channel with extensions of 12", 20" or 24". (Bumper crosslays include a 28" extension)
- "Black out" options for the cab, bumper and body available.

Body Features

- Extruded aluminum "flat back" pumper body
- 42" / 56" Wide full height side compartments (shallow uppers)
- Diamond plate or inset painted wheel wells with bolt-on polished alum or rubber trim
- Low B1 (Transverse); hinged or roll-up door
- 530, 780 or 1030-gallon tank capacities available with optional integral foam cell
- Enclosed officer side tunnel for 24' 2-section, 14' roof and 10' attic ladders, backboard and (2) or (3) 10' pike poles. Optional hard suction hose storage in tunnel above ladders.
- Roll-up or hinged side body doors with optional drip pans
- Body options include diamond plate hose bed covers, wheel well storage, shelves, trays and tool boards for equipment mounting.

Fire Package

- Pump module designs available include Side-Mount, enclosed Side-Mount, Top-Mount, Top-Mount with integral speedlays and Top-Mount with forward speedlay module.

Fire Package (cont.)


- Hale and Waterous pumps up to 2000 GPM with stainless steel discharge manifold
- Standard discharges include (2) 2.5" left side, 2.5" and 4" right side, 2.5" driver side rear, 1.5" crosslay and / or speedlay (if equipped) and 3" deck gun.
- Options available for additional 2.5" rear discharges, 1.5" or 2.5" front bumper discharge, bumper crosslays, decontamination outlet and top or rear booster reel.
- Direct injection foam system or foam eductor available
- Integral master intake valves and front intake available

Electrical & Warning

- Multiplex electrical system provides increased feature capability and improved diagnostics
- Standard color display for driver; additional officer side display available.
- Wide selection of LED warning, LED scene lights and sirens are available
- Cab roof mounted light tower w/12v LED heads also available

E-ONE Select Series™

Pumper W/ Ladder Tunnel (Stainless Body)

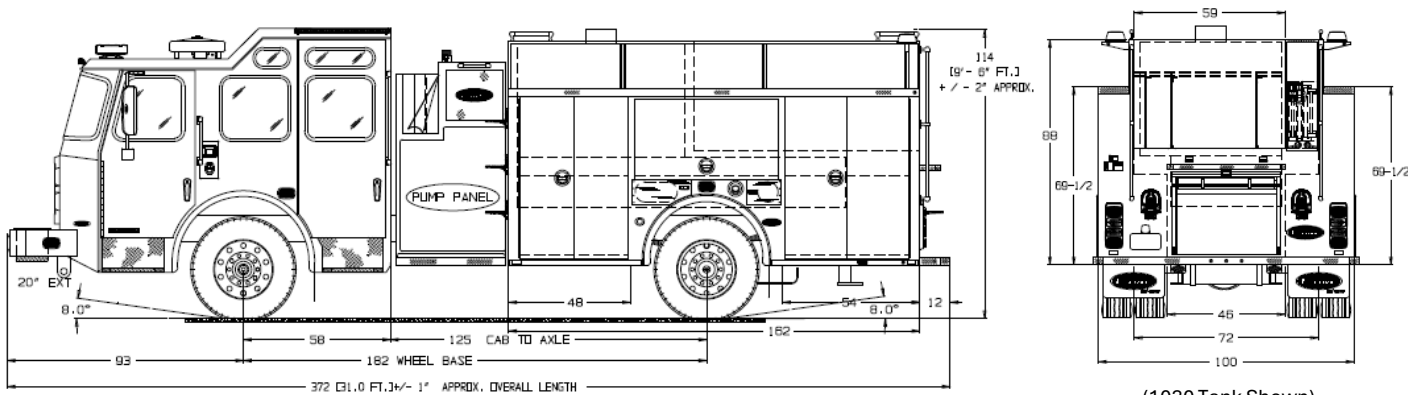

(1030 Tank Shown)

Custom Chassis

- Cyclone® or Typhoon® chassis
- Medium (58”), long (67.5”) and stretched long (74”) 4-door cab lengths available with seating for up to (8).
- Optional 12” or 16” rear Vista roof heights (with Cyclone cab a 4” front raised roof is included with Vista roof option). Cyclone cab also available with 4” full length raised roof.
- 450 HP engine (1250 torque w/EVS3000 trans or 1650 torque with EVS4000 trans)
- Standard safety features such as roll cage cab, front and side air bags, CrewGuard & Electronic Stability Control.
- Optional wheel well, rear wall and lower rear side cabinets.
- Galvanized / powder coated frame for corrosion protection
- Bumper options include 10” polished stainless, 10” or 12” HD steel channel with extensions of 12”, 20” or 24”. (Bumper crosslays include a 28” extension)
- “Black out” options for the cab, bumper and body available.

Body Features

- Stainless steel “flat back” pumper body with FRP overlays
- 44” / 50” Wide compartment openings with full height side compartments (shallow uppers)
- Low B1 (Separate compartment); hinged or roll-up door.
- 530, 780 or 1030-gallon tank capacities available with optional integral foam cell
- Enclosed officer side tunnel for 24’ 2-section, 14’ roof and 10’ attic ladders, backboard and (2) or (3) 10’ pike poles. Optional hard suction hose storage in tunnel above ladders.
- Roll-up or hinged side body doors with optional drip pans
- Body options include diamond plate hose bed covers, wheel well storage, shelves, trays and tool boards for equipment mounting.

Fire Package

- Pump module designs available include Side-Mount, enclosed Side-Mount, Top-Mount, Top-Mount with integral speedlays and Top-Mount with forward speedlay module.

Fire Package (cont.)

- Hale and Waterous pumps up to 2000 GPM with stainless steel discharge manifold
- Standard discharges include (2) 2.5” left side, 2.5” and 4” right side, 2.5” driver side rear, 1.5” crosslay and / or speedlay (if equipped) and 3” deck gun.
- Options available for additional 2.5” rear discharges, 1.5” or 2.5” front bumper discharge, bumper crosslays, decontamination outlet and top or rear booster reel.
- Direct injection foam system or foam eductor available
- Integral master intake valves and front intake available

Electrical & Warning

- Multiplex electrical system provides increased feature capability and improved diagnostics
- Standard color display for driver; additional officer side display available.
- Wide selection of LED warning, LED scene lights and sirens are available
- Cab roof mounted light tower w/12v LED heads also available