




INNOVATION | VERSATILITY | PERFORMANCE

e-one.com

## eMAX RESCUE PUMPER WOODBIDGE FIRE DIST. #5 - AVENEL, NJ

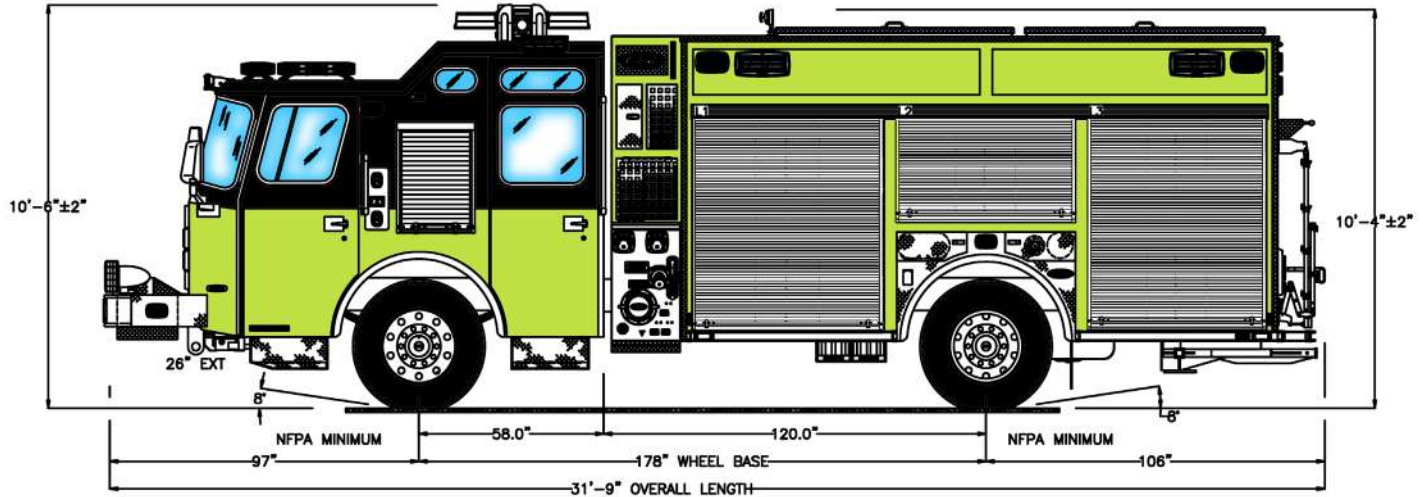

## SPECIFICATIONS

### SO 140200

#### CHASSIS

- 45,700 lbs. GVWR
- 178" wheelbase
- 10'-6" +/- 2" travel height
- 31'-9" overall length
- 3-way under body rear receiver
- E-ONE Typhoon® 58" extruded aluminum cab, 12" vista roof, severe duty interior, IMMI® 4Front and RollTek air bags, suspended map box, driver wheel well medical cabinet, Bostrom® seats for five with Bostrom® SecureAll SCBA brackets, Hansen lighted LED handrails
- Cummins® ISL 450 HP engine with Jacobs® compression brake and Allison® EVS3000P transmission
- Meritor® FL941 18,700 lb front axle
- Meritor® RS-25-160 27,000 lb rear axle
- 17" disc front brakes and S-Cam 16.5" x 7.0" rear with G4™ electronic stability control (ESC)
- Leece Neville® 320 AMP alternator with five Group 31 1000 CCA batteries and LED headlights
- Michelin® tires- 385 front and 12R rear with M&S tread
- Alcoa® aluminum wheels

#### BODY

- Extruded aluminum body
- Full height/full depth rescue style driver and officer side compartments with R-O•M™ roll-up doors, enclosed wheel well storage for (7) SCBA bottles, driver and officer extra width roof top storage compartments, Hansen LED lighted handrails
- Enclosed rear ladder tunnel for 24', 14' and 10' ladders and (2) pike poles
- E-ONE PTO driven three tool hydraulic rescue tool (HRT) system with wireless controllers and three hydraulic reels
- 530 gallon UPF Poly III tank

#### PUMP AND PLUMBING

- eMAX™ 1,500 GPM low profile split shaft pump with side intake relief valve and FRC TGA400 pressure governor
- Enclosed side mount pump operator's panel
- Triple speedlays with removable trays, 3" deck gun piping with TFT® Extend-A-Gun
- Akron® valves with stainless steel manifolds and piping

OUR VEHICLES CONNECT AND PROTECT  
PEOPLE AROUND THE WORLD EVERYDAY.  
www.revgroup.com







## ELECTRIC AND WARNING

- Weldon® V-MUX® Multiplex electrical system with Vista IV display
- Vehicle Data Recorder with CrewGuard™ occupant detection
- Whelen® Freedom® IV 72" LED light bar, (2) Freedom IV 21.5" mini LED light bars, M9 LED upper rear warning lights, M6/M2 LED lower level warning lights, Federal Signal® SMLLED directional bar
- Federal Signal® PA300 siren, Federal Signal® ES100 speaker, Federal Signal® Q2B siren
- R-O•M™ V4 compartment, (4) Whelen Pioneer LED 12V scene lights, (4) Whelen 110V Pioneer scene lights, (2) Whelen M9 LED scene lights
- Will-Burt Night Scan NS4.5 light tower with (6) 110V Magnafire quartz light heads
- Smart Power 15KW hydraulic generator, 200' 10/4 electric cord reel, (2) L5-20 twist lock receptacles

## STANDARD WARRANTIES

- 5-year multiplex modules
- 6-year pump
- 10-year cab, body, paint and plumbing
- Lifetime structural frame and water tank

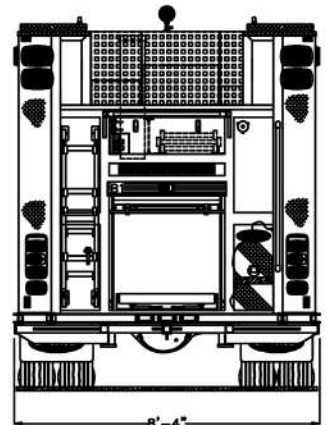

HOISTED HEIGHT:  
(FOR REFERENCE ONLY)  
TO TALKBOARD: 82"  
TO GROUND: 82"

