

WE INNOVATE EVERY DAY. e-one.com

eMAX RESCUE PUMPER

SPROAT LAKE VOLUNTEER FIRE DEPT - PORT ALBERNI, BC SO 142370



SPECIFICATIONS

CHASSIS

- 49,000 lbs. GVWR
- 178" wheelbase with galvanized powder coated frame rails
- 10'-1" +/-2" travel height
- 30'-4" overall length
- 2019 E-ONE Typhoon[®] 58" extruded aluminum cab with barrier doors, 16" vista roof, severe duty interior with cast aluminum dash, Seats, Inc[®] 911 seats for (6) with IMMI[®] SmartDock Gen2 SCBA brackets and Ready Reach seat belt extenders
- Cummins[®] L9 450 HP engine with Jacobs[®] compression brake and Allison[®] EVS3000P transmission
- Meritor® FL941 18,000 lb front axle
- Meritor® RS-30-185 31,000 lb rear axle with DCDL
- Meritor[®] 16.5" x 6" front and 16.5" x 7" S-cam rear brakes with ABS and G4[™] electronic stability control (ESC)
- Niehoff[®] 360 AMP alternator with (4) Group 31 1000 CCA batteries and LED headlights

- Michelin® tires- 385 front and 315 rear with all-weather tread
- Alcoa[®] aluminum wheels

BODY

- Extruded aluminum eMAX body
- Full height compartments driver and officer side (full depth on driver side), Amdor[®] roll-up doors, enclosed transverse storage for backboards, enclosed wheel well storage for (10) SCBA bottles, driver and officer roof top compartments, enclosed storage for hard suction, Sure Step V2 rear access ladder
- Rear storage tunnel for 24', 14' and 10' ladders, (2) pike poles and backboard
- 1280 gallon UPF Poly III tank (1250 Water/30 Foam)

OUR VEHICLES CONNECT AND PROTECT PEOPLE AROUND THE WORLD EVERY DAY. www.revgroup.com





PUMP AND PLUMBING

- eMAX[™] 1,500 GPM low profile split shaft pump with FRC PBA400 pressure governor
- Enclosed pump operator's panel
- Triple speedlays with removable trays
- Rear Newton[®] air actuated dump with 12" extension
- Akron[®] valves with stainless steel manifolds and piping


ELECTRIC AND WARNING

f Ў in 🕨 🖸

- Weldon[®] V-MUX[®] Multiplex electrical system with driver Vista IV display, AXIS Smart Truck Technology, Federal Signal[®] back-up camera, Sigtronics intercom system
- Vehicle Data Recorder with CrewGuard™ occupant detection
- Federal Signal[®] Navigator 73" LED light bar, Federal Signal[®] Navigator 25" LED side facing light bars, Federal Signal[®] Quadraflare QL97 LED upper rear warning lights, TecNiq[®] K60/K50 LED lower level warning lights, Federal Signal[®] Latitude SL8S-A LED directional bar
- Whelen® 295SLSA1 siren, Federal Signal® ES100 speaker
- Hansen[®] LED compartment lights, FireTech[®] 72" LED front brow light, (8) FireTech[®] FT-GESM scene lights

STANDARD WARRANTIES

- 5-year multiplex modules
- 6-year pump
- 10-year cab, body, paint and plumbing
- 25-year frame rail corrosion
- Lifetime structural frame and water tank

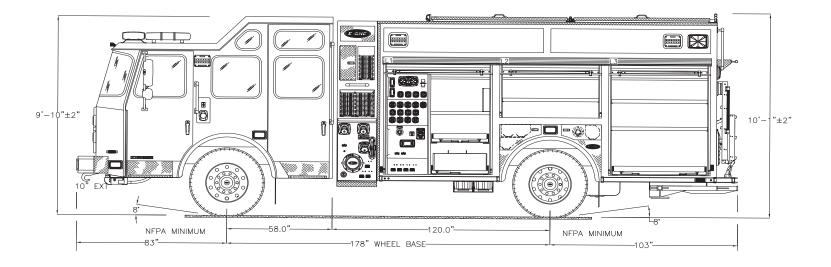

X 12.75 DEEP X 18.75" DEEP

352.237.1122 I e-one.com